

Aluminum Capacitors Power Long Life Snap-in





Fig.1 Component outlines.

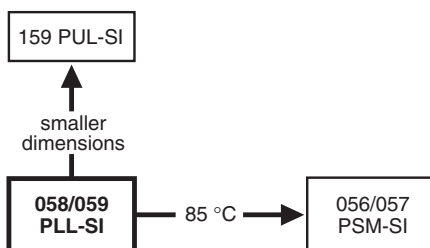

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, minimized dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Very long useful life: up to 10000 hours at 105 °C
- Extended temperature range: 105 °C
- Low ESR, high ripple current capability
- Keyed polarity version available.

APPLICATIONS

- Computer, telecommunication and industrial systems
- Smoothing and filtering applications
- Standard and switched mode power supplies
- Energy storage in pulse systems.

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF).
- Tolerance code on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$).
- Rated voltage (in V).
- Date code (YYMM).
- Name of manufacturer.
- Code for factory of origin.
- ‘-’ sign to identify the negative terminal, visible from the top and side of the capacitor.
- Code number.
- Climatic category in accordance with IEC 60068.

QUICK REFERENCE DATA		
DESCRIPTION	VALUE	
	058	059
Nominal case sizes ($\varnothing D \times L$ in mm)	22 × 25 to 35 × 50	
Rated capacitance range (E6 series), C_R	33 to 47000 μF	
Tolerance on C_R	$\pm 20\%$	
Rated voltage range, U_R	10 to 100 V	200 to 400 V
Category temperature range	-40 to +105 °C	
Endurance test at 105 °C	≤ 50 V: 2000 hours; ≥ 63 V: 5000 hours	
Useful life at 105 °C	≤ 50 V: 5000 hours; ≥ 63 V: 10000 hours	
Useful life at 40 °C, $1.9 \times I_R$ applied	≤ 50 V: 125000 hours; ≥ 63 V: 250000 hours	
Shelf life at 0 V, 105 °C	500 hours	
Based on sectional specification	IEC 60384-4/EN130300	
Climatic category IEC 60068	40/105/56	

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES FOR 058 SERIES ($\varnothing D \times L$ in mm)							
C_R (μF)	U_R (V)						
	10	16	25	40	50	63	100
330	-	-	-	-	-	-	22 × 25
470	-	-	-	-	-	-	22 × 30
680	-	-	-	-	-	22 × 25	25 × 30
	-	-	-	-	-	-	22 × 40
1000	-	-	-	-	22 × 25	22 × 30	30 × 30
	-	-	-	-	-	-	25 × 40
1500	-	-	-	22 × 25	22 × 30	25 × 30	30 × 40
	-	-	-	-	-	22 × 40	25 × 50




SELECTION CHART FOR C_R U_R AND RELEVANT NOMINAL CASE SIZES FOR 058 SERIES (∅D × L in mm)							
C _R (μF)	U _R (V)						
	10	16	25	40	50	63	100
2200	–	–	22 × 25	22 × 30	25 × 30	30 × 30	35 × 40
	–	–	–	–	22 × 40	25 × 40	30 × 50
3300	–	22 × 25	22 × 30	25 × 30	30 × 30	30 × 40	35 × 50
	–	–	–	22 × 40	25 × 40	25 × 50	–
4700	22 × 25	22 × 30	25 × 30	30 × 30	30 × 40	35 × 40	–
	–	–	22 × 40	25 × 40	25 × 50	30 × 50	–
6800	22 × 30	25 × 30	30 × 30	30 × 40	35 × 40	35 × 50	–
	–	22 × 40	25 × 40	25 × 50	30 × 50	–	–
10000	25 × 30	30 × 30	30 × 40	35 × 40	35 × 50	–	–
	22 × 40	25 × 40	25 × 50	30 × 50	–	–	–
15000	30 × 30	30 × 40	35 × 40	35 × 50	–	–	–
	25 × 40	25 × 50	30 × 50	–	–	–	–
22000	30 × 40	35 × 40	35 × 50	–	–	–	–
	25 × 50	30 × 50	–	–	–	–	–
33000	35 × 40	35 × 50	–	–	–	–	–
	30 × 50	–	–	–	–	–	–
47000	35 × 50	–	–	–	–	–	–

SELECTION CHART FOR C_R U_R AND RELEVANT NOMINAL CASE SIZES FOR 059 SERIES (∅D × L in mm)				
C _R (μF)	U _R (V)			
	200	250	385	400
33	–	–	22 × 25	–
47	–	–	22 × 30	22 × 30
68	–	22 × 25	22 × 35	22 × 35
	–	–	25 × 30	25 × 30
100	22 × 25	22 × 30	30 × 30	30 × 30
	–	–	25 × 40	25 × 40
150	22 × 30	22 × 35	25 × 50	30 × 35
	–	25 × 30	30 × 40	25 × 50
220	22 × 35	30 × 30	35 × 40	35 × 40
	25 × 30	25 × 35	30 × 50	30 × 50
330	30 × 30	30 × 35	35 × 50	35 × 50
	25 × 40	25 × 50	–	–
470	30 × 35	35 × 35	–	–
	25 × 50	30 × 45	–	–
680	35 × 35	35 × 45	–	–
	30 × 45	–	–	–
1000	35 × 50	–	–	–

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

TWO TERMINAL SNAP-IN

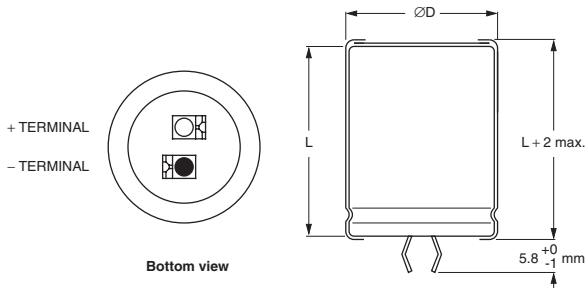

The minus terminal can be marked with a black dot or with an imprinted '-' sign.

Fig.2 Two terminal snap-in.






Fig.3 Mounting hole diagram.

THREE TERMINAL SNAP-IN

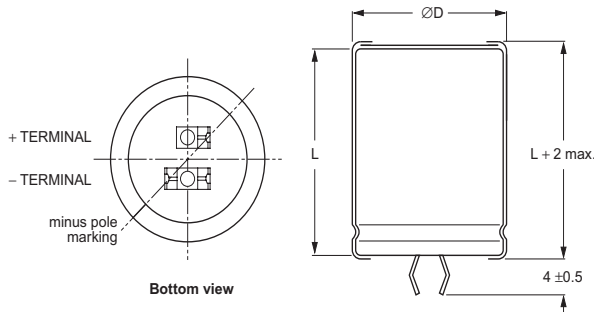

The negative terminal has **TWO** pins which are **BOTH** electrically connected.

Fig.4 Three terminal snap-in.



The 10 mm spacing of the 2 pin snap-in is used as the base layout and a third hole is added.

The third hole is closer to the negative primary hole so that polarization is always maintained, together with added mechanical stability.

Fig.5 Mounting hole diagram.

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES					
NOMINAL CASE SIZE ØD × L	ØD _{max}	L _{max}	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS L × W × H
22 × 25	23	27	≈12	100	260 × 250 × 39
22 × 30	23	32	≈16	100	260 × 250 × 44
22 × 35	23	37	≈20	100	260 × 250 × 49
22 × 40	23	42	≈23	100	260 × 250 × 54
25 × 30	26	32	≈22	100	290 × 280 × 44
25 × 35	26	37	≈24	100	290 × 280 × 49
25 × 40	26	42	≈27	100	290 × 280 × 54
25 × 50	26	52	≈38	100	290 × 280 × 64
30 × 30	31	32	≈30	100	340 × 330 × 44
30 × 35	31	37	≈35	100	340 × 330 × 49
30 × 40	31	42	≈40	100	340 × 330 × 54
30 × 45	31	47	≈45	100	340 × 330 × 59
30 × 50	31	52	≈50	100	340 × 330 × 64
35 × 35	36	37	≈48	50	390 × 198 × 49
35 × 40	36	42	≈55	50	390 × 198 × 54
35 × 45	36	47	≈63	50	390 × 198 × 59
35 × 50	36	52	≈72	50	390 × 198 × 64



Aluminum Capacitors
Power Long Life Snap-in

Vishay BCcomponents

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C _R	rated capacitance at 100 Hz
I _R	rated RMS ripple current at 100 Hz or ≥ 10 kHz and 105 °C
I _{L1}	max. leakage current after 1 minute at U _R
I _{L5}	max. leakage current after 5 minutes at U _R
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 10 kHz

ORDERING EXAMPLE

Electrolytic capacitor 058 series
 10000 µF/25 V; ±20%
 Nominal case size: Ø30 × 40 mm
 2-terminal snap-in:
 Catalog number: 2222 058 56103.
 3-terminal snap-in:
 Catalog number: 2222 058 76103.

Note

- Unless otherwise specified, all electrical values in Tables 2 and 3 apply at T_{amb} = 20 °C, P = 86 to 106 kPa, RH = 45 to 75%.

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION FOR 058 SERIES										
U _R (V)	C _R 100 Hz (µF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 105 °C (A)	I _R ≥10 kHz 105 °C (A)	I _{L1} 1 min (µA)	I _{L5} 5 min (µA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOG NUMBER 2222 058	
									2-TERM.	3-TERM.
10	4700	22 × 25	1.95	2.30	286	98	82	57	54472	74472
	6800	22 × 30	2.44	2.88	412	140	61	44	54682	74682
	10000	25 × 30	2.81	3.32	604	204	54	42	54103	74103
	10000	22 × 40	3.29	3.88	604	204	43	32	44103	24103
	15000	30 × 30	3.53	4.17	904	304	42	34	54153	74153
	15000	25 × 40	3.78	4.46	904	304	38	30	44153	24153
	22000	30 × 40	4.62	5.45	1324	444	31	25	54223	74223
	22000	25 × 50	4.68	5.52	1324	444	31	24	44223	24223
	33000	35 × 40	5.15	6.08	1984	664	30	24	54333	74333
	33000	30 × 50	5.70	6.73	1984	664	24	21	44333	24333
	47000	35 × 50	6.23	7.35	2824	944	24	21	54473	74473
16	3300	22 × 25	1.90	2.24	321	110	86	57	55332	75332
	4700	22 × 30	2.36	2.78	455	154	65	44	55472	75472
	6800	25 × 30	2.75	3.25	657	222	56	42	55682	75682
	6800	22 × 40	3.18	3.75	657	222	46	32	45682	25682
	10000	30 × 30	3.44	4.06	964	324	44	34	55103	75103
	10000	25 × 40	3.66	4.32	964	324	40	30	45103	25103
	15000	30 × 40	4.55	5.37	1444	484	32	25	55153	75153
	15000	25 × 50	4.55	5.37	1444	484	32	24	45153	25153
	22000	35 × 40	5.07	5.98	2116	708	31	24	55223	75223
	22000	30 × 50	5.67	6.69	2116	708	25	21	45223	25223
	33000	35 × 50	6.23	7.35	3172	1060	25	21	55333	75333
25	2200	22 × 25	1.76	2.08	334	114	100	57	56222	76222
	3300	22 × 30	2.23	2.63	499	169	73	44	56332	76332
	4700	25 × 30	2.60	3.07	709	239	62	42	56472	76472
	4700	22 × 40	3.00	3.54	709	239	52	32	46472	26472
	6800	30 × 30	3.26	3.85	1024	344	49	34	56682	76682
	6800	25 × 40	3.49	4.12	1024	344	44	30	46682	26682
	10000	30 × 40	4.37	5.16	1504	504	35	25	56103	76103
	10000	25 × 50	4.37	5.16	1504	504	35	24	46103	26103
	15000	35 × 40	4.91	5.79	2254	754	33	24	56153	76153
	15000	30 × 50	5.43	6.41	2254	754	27	21	46153	26153
	22000	35 × 50	6.07	7.16	3304	1104	27	21	56223	76223
40	1500	22 × 25	1.65	2.01	364	124	114	65	57152	77152
	2200	22 × 30	2.04	2.49	532	180	87	50	57222	77222
	3300	25 × 30	2.43	2.99	796	268	71	45	57332	77332
	3300	22 × 40	2.78	3.39	796	268	60	37	47332	27332
	4700	30 × 30	2.96	3.61	1132	380	59	40	57472	77472
	4700	25 × 40	3.26	3.90	1132	380	51	32	47472	27472
	6800	30 × 40	3.94	4.81	1636	548	42	29	57682	77682
	6800	25 × 50	4.10	5.00	1636	548	39	26	47682	27682
	10000	35 × 40	4.18	5.10	2404	804	46	29	57103	77103
	10000	30 × 50	4.98	6.08	2404	804	36	24	47103	27103
	15000	35 × 50	5.21	6.36	3604	1204	36	24	57153	77153



ELECTRICAL DATA AND ORDERING INFORMATION FOR 058 SERIES										
U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 105 °C (A)	I _R ≥10 kHz 105 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOG NUMBER 2222 058	
									2-TERM.	3-TERM.
50	1000	22 × 25	1.50	1.83	304	104	138	69	51102	71102
	1500	22 × 30	1.88	2.29	454	154	102	54	51152	71152
	2200	25 × 30	2.27	2.77	664	124	82	47	51222	71222
	2200	22 × 40	2.55	3.11	664	124	71	38	41222	21222
	3300	30 × 30	2.81	3.43	994	334	66	41	51332	71332
	3300	25 × 40	3.07	3.75	994	334	57	33	41332	21332
	4700	30 × 40	3.77	4.60	1414	474	47	30	51472	71472
	4700	25 × 50	3.85	4.70	1414	474	43	27	41472	21472
	6800	35 × 40	4.01	4.89	2044	684	49	30	51682	71682
	6800	30 × 50	4.74	5.78	2044	684	38	24	41682	21682
	10000	35 × 50	5.04	6.15	3004	1004	38	24	51103	71103
63	680	22 × 25	1.17	1.43	261	90	228	150	58681	78681
	1000	22 × 30	1.46	1.78	382	130	170	115	58102	78102
	1500	25 × 30	1.76	2.15	571	193	137	85	58152	78152
	1500	22 × 40	2.00	2.44	571	193	115	85	48152	28152
	2200	30 × 30	2.27	2.77	836	281	101	70	58222	78222
	2200	25 × 40	2.40	2.93	836	281	94	70	48222	28222
	3300	30 × 40	3.07	3.75	1251	420	70	50	58332	78332
	3300	25 × 50	3.07	3.75	1251	420	70	50	48332	28332
	4700	35 × 40	3.65	4.45	1781	596	60	45	58472	78472
	4700	30 × 50	3.88	4.73	1781	596	53	45	48472	28472
	6800	35 × 50	4.58	5.59	2574	861	46	35	58682	78682
100	330	22 × 25	0.92	1.12	202	70	370	250	59331	79331
	470	22 × 30	1.14	1.39	286	98	280	190	59471	79471
	680	25 × 30	1.35	1.65	412	140	232	140	59681	79681
	680	22 × 40	1.57	1.92	412	140	190	140	49681	29681
	1000	30 × 30	1.79	2.40	604	204	163	115	59102	79102
	1000	25 × 40	1.85	2.26	604	204	158	115	49102	29102
	1500	30 × 40	2.45	2.99	904	304	111	85	59152	79152
	1500	25 × 50	2.38	2.90	904	304	116	85	49152	29152
	2200	35 × 40	3.05	3.72	1324	444	86	65	59222	79222
	2200	30 × 50	3.13	3.82	1324	444	82	65	49222	29222
	3300	35 × 50	3.84	4.68	1984	664	64	50	59332	79332

Table 3


ELECTRICAL DATA AND ORDERING INFORMATION FOR 059 SERIES										
U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE ØD × L (mm)	I _R 100 Hz 105 °C (A)	I _{L1} 1 min (μA)	I _{L5} 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOG NUMBER 2222 059		
								2-TERM.	3-TERM.	
200	100	22 × 25	0.53	124	44	1280	730	52101	72101	
	150	22 × 30	0.67	184	64	850	540	52151	72151	
	220	22 × 35	0.86	268	92	610	430	32221	12221	
	220	25 × 30	0.87	268	92	610	430	52221	72221	
	330	30 × 30	1.12	400	136	435	300	52331	72331	
	330	25 × 40	1.12	400	136	435	300	42331	22331	
	470	30 × 35	1.46	568	192	335	225	32471	12471	
	470	25 × 50	1.25	568	192	335	225	42471	22471	
	680	30 × 45	1.87	820	276	235	155	32681	12681	
	680	35 × 35	1.85	820	276	235	155	62681	82681	
	1000	35 × 50	2.45	1204	404	160	125	52102	72102	
250	68	22 × 25	0.49	106	38	1640	760	53689	73689	
	100	22 × 30	0.62	154	54	1110	570	53101	73101	
	150	22 × 35	0.82	229	79	795	440	33151	13151	
	150	25 × 30	0.82	229	79	795	440	53151	73151	
	220	25 × 35	1.03	334	114	540	300	33221	13221	
	220	30 × 30	1.06	334	114	540	300	53221	73221	
	330	30 × 35	1.43	499	169	385	225	33331	13331	
	330	25 × 50	1.40	499	169	385	225	43331	23331	
	470	30 × 45	1.79	709	239	270	155	33471	13471	
	470	35 × 35	1.79	709	239	270	155	63471	83471	
	680	35 × 45	2.25	1024	344	190	125	43681	23681	



ELECTRICAL DATA AND ORDERING INFORMATION FOR 059 SERIES									
U _R (V)	C _R 100 Hz (µF)	NOMINAL CASE SIZE ∅D × L (mm)	I _R 100 Hz 105 °C (A)	I _{L1} 1 min (µA)	I _{L5} 5 min (µA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOG NUMBER 2222 059	
								2-TERM.	3-TERM.
385	33	22 × 25	0.32	80	29	3860	3000	58339	78339
	47	22 × 30	0.41	113	40	2710	2100	58479	78479
	68	22 × 35	0.53	161	56	1870	1460	38689	18689
	68	25 × 30	0.52	161	56	1870	1460	58689	78689
	100	30 × 30	0.72	235	81	1270	1010	58101	78101
	100	25 × 40	0.72	235	81	1270	1010	48101	28101
	150	30 × 40	0.99	351	119	850	675	58151	78151
	150	25 × 50	0.99	351	119	850	675	48151	28151
	220	35 × 40	1.31	512	173	580	465	58221	78221
	220	30 × 50	1.31	512	173	580	465	48221	28221
	330	35 × 50	1.75	766	258	390	320	58331	78331
400	47	22 × 30	0.30	117	42	4260	3490	56479	76479
	68	22 × 35	0.38	167	58	2950	2420	36689	16689
	68	25 × 30	0.41	167	58	2950	2420	56689	76689
	100	30 × 30	0.55	244	84	2020	1660	56101	76101
	100	25 × 40	0.55	244	84	2020	1660	46101	26101
	150	30 × 35	0.68	364	124	1350	1110	36151	16151
	150	25 × 50	0.78	364	124	1350	1110	46151	26151
	220	35 × 40	0.94	532	180	930	760	56221	76221
	220	30 × 50	0.94	532	180	930	760	46221	26221
		330	35 × 50	1.25	796	260	620	510	56331


ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	≤ 250 V versions	U _S = 1.15 × U _R
	≥ 385 V versions	U _S = 1.1 × U _R
Reverse voltage		U _{rev} ≤ 1 V
Current		
Leakage current	after 1 minute at U _R	I _{L1} ≤ 0.006 C _R × U _R + 4 µA
	after 5 minutes at U _R	I _{L5} ≤ 0.002 C _R × U _R + 4 µA
Inductance		
Equivalent series inductance (ESL)	all case sizes	typ. 19 nH
		max. 25 nH

CAPACITANCE (C)

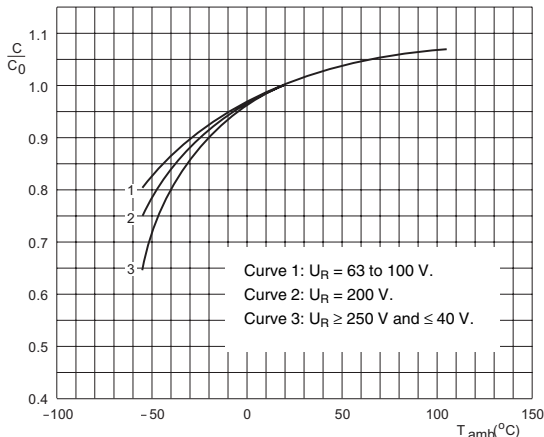

C₀ = capacitance at 20 °C and 100 Hz.

Fig.6 Typical multiplier of capacitance as a function of ambient temperature.

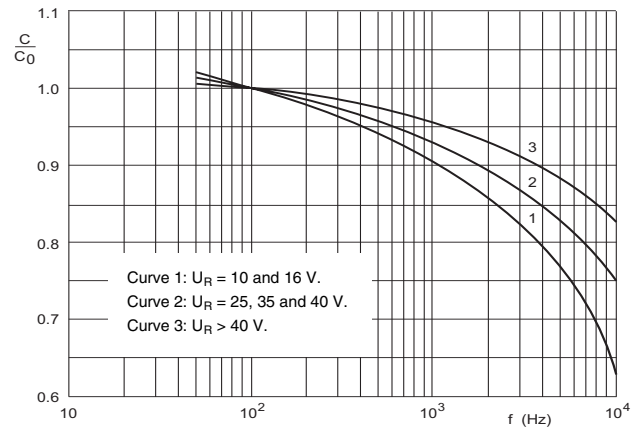


C₀ = capacitance at 20 °C and 100 Hz.

Fig.7 Typical multiplier of capacitance as a function of frequency.




EQUIVALENT SERIES RESISTANCE (ESR)

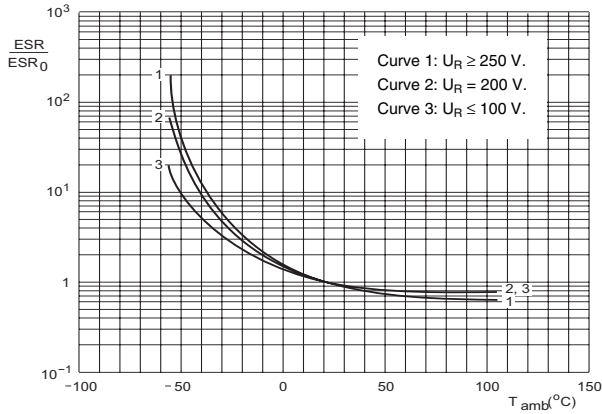

ESR_0 = typical at 20 °C and 100 Hz.


Fig.8 Typical multiplier of ESR as a function of ambient temperature.

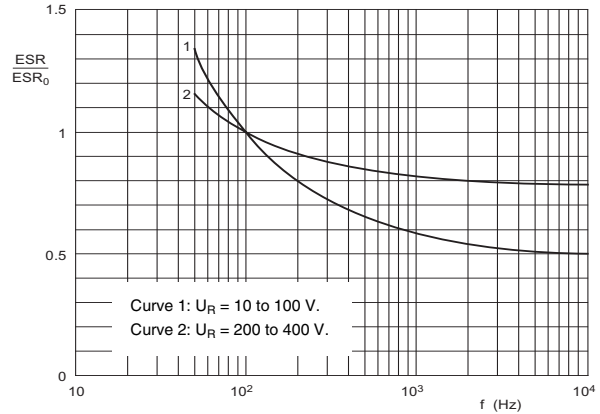

ESR_0 = typical at 20 °C and 100 Hz.


Fig.9 Typical multiplier of ESR as a function of frequency.

IMPEDANCE (Z)

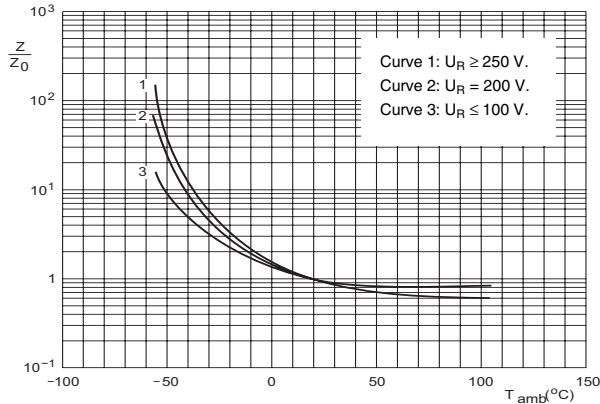

Z_0 = typical impedance at 20 °C and 10 kHz.


Fig.10 Typical multiplier of impedance as a function of ambient temperature.

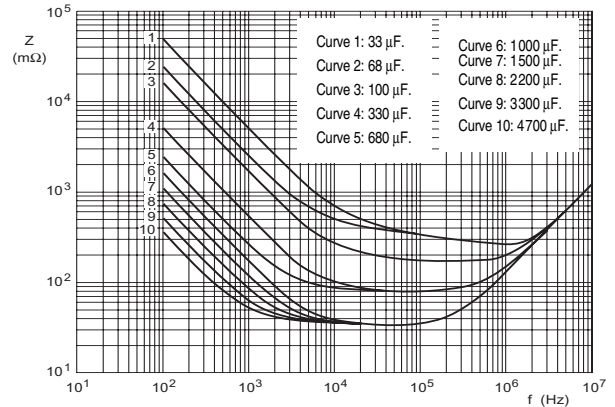

Case $\varnothing D \times L = 22 \times 25$ mm.

$T_{amb} = 20$ °C.


Fig.11 Typical impedance as a function of frequency.

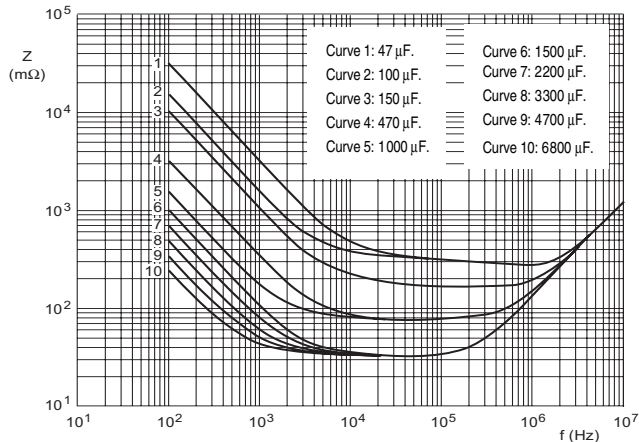

Case $\varnothing D \times L = 22 \times 30$ mm.

$T_{amb} = 20$ °C.

Fig.12 Typical impedance as a function of frequency.

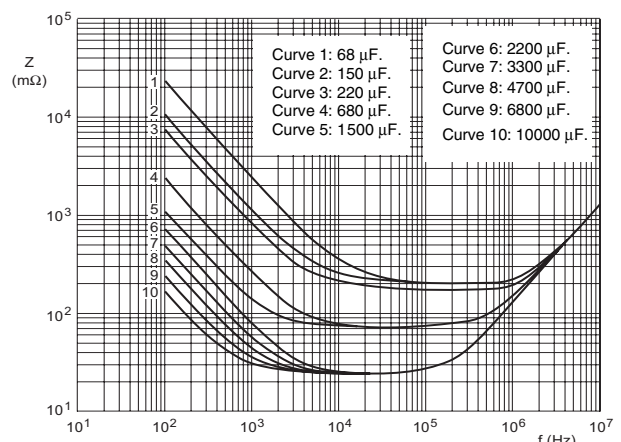


Case $\varnothing D \times L = 25 \times 30$ and 22×40 mm.

$T_{amb} = 20$ °C.


Fig.13 Typical impedance as a function of frequency.



IMPEDANCE (Z)

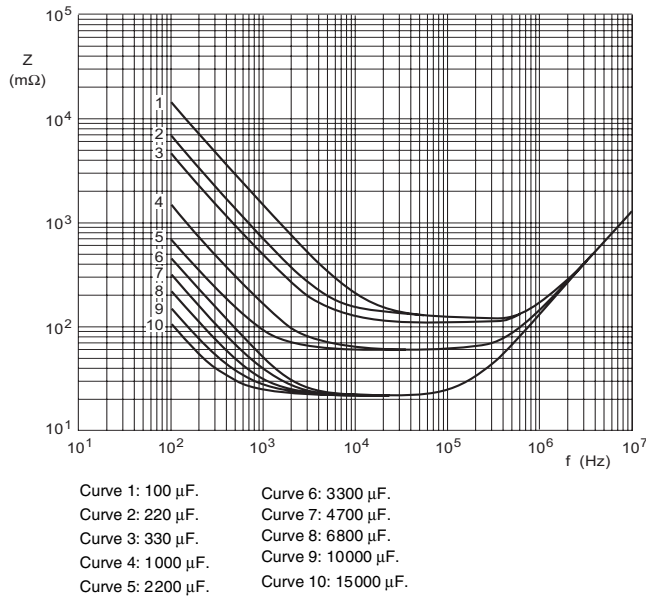


Case ØD x L = 30 x 30 and 25 x 40 mm. $T_{amb} = 20\text{ }^{\circ}\text{C}.$

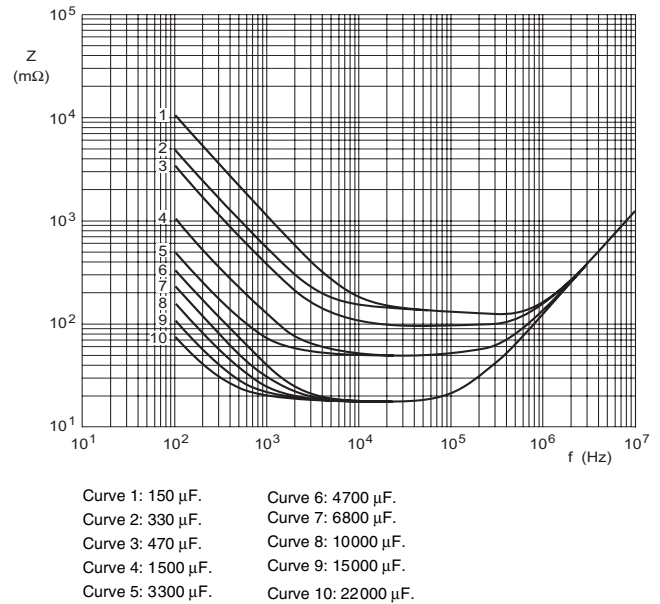


Case ØD x L = 30 x 40 and 25 x 50 mm. $T_{amb} = 20\text{ }^{\circ}\text{C}.$

Fig.14 Typical impedance as a function of frequency.

Fig.15 Typical impedance as a function of frequency.

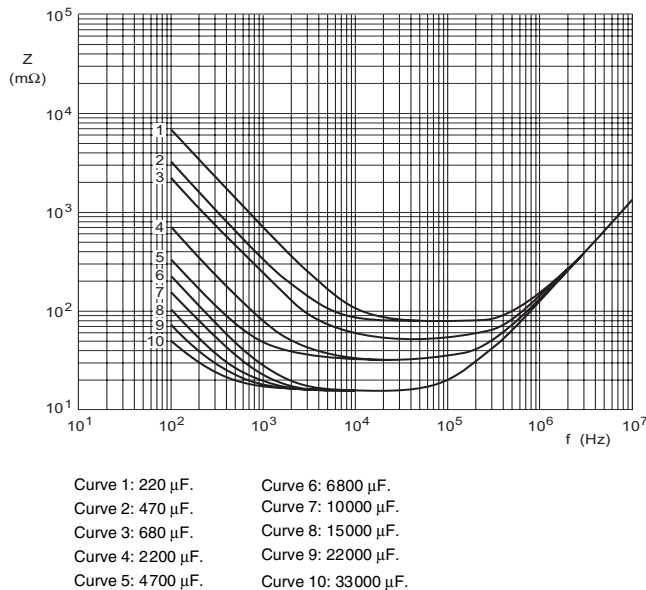

Case ØD x L = 35 x 40 and 30 x 50 mm. $T_{amb} = 20\text{ }^{\circ}\text{C}.$

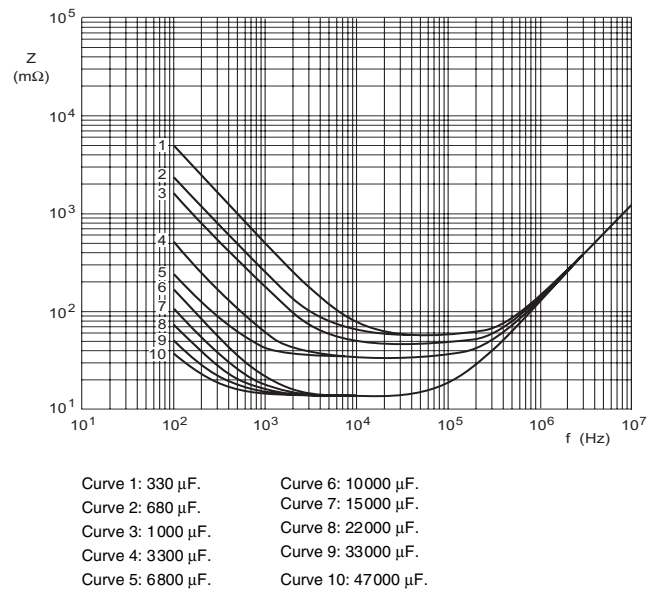

Case ØD x L = 35 x 50 mm. $T_{amb} = 20\text{ }^{\circ}\text{C}.$


Fig.16 Typical impedance as a function of frequency.

Fig.17 Typical impedance as a function of frequency.



RIPPLE CURRENT AND USEFUL LIFE

MGA 454

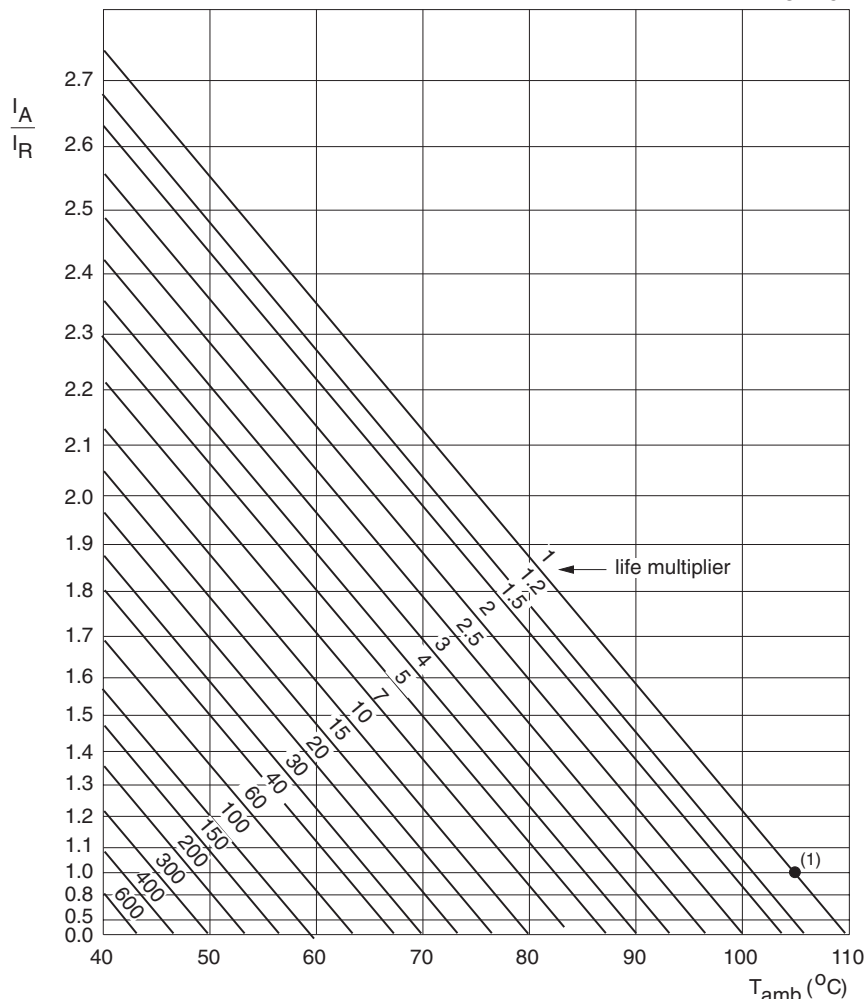

I_A = actual ripple current at 100 Hz.
 I_R = rated ripple current at 100 Hz and 105 °C.
 (1) Useful life at 105 °C and I_R applied:
 5000 hours for ≤ 50 V types;
 10000 hours for ≥ 63 V types.

Fig.18 Multiplier of useful life as a function of ambient temperature and ripple current load.

Table 4

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 10 \text{ to } 25 \text{ V}$	$U_R = 40 \text{ to } 100 \text{ V}$	$U_R > 100 \text{ V}$
50	0.93	0.91	0.86
100	1.00	1.00	1.00
200	1.04	1.05	1.13
400	1.07	1.09	1.21
1000	1.11	1.13	1.29
2000	1.13	1.15	1.32
4000	1.15	1.18	1.35
≥10000	1.18	1.22	1.40



Table 5

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 105\text{ }^{\circ}\text{C}$; U_R applied; $\leq 50\text{ V}$ types: 2000 hours; $\geq 63\text{ V}$ types: 5000 hours	$U_R \leq 100\text{ V}$; $\Delta C/C$: $\pm 15\%$ $U_R > 100\text{ V}$; $\Delta C/C$: $\pm 10\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 105\text{ }^{\circ}\text{C}$; U_R and I_R applied; $\leq 50\text{ V}$ types: 5000 hours; $\geq 63\text{ V}$ types: 10000 hours	$U_R \leq 100\text{ V}$; $\Delta C/C$: $\pm 45\%$ $U_R > 100\text{ V}$; $\Delta C/C$: $\pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100\text{ V}$: $\leq 1\%$; $U_R > 100\text{ V}$: $\leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 105\text{ }^{\circ}\text{C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$: $\pm 10\%$ $ESR \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$