

# Lighting and Fan Speed Controls

## C

Smart Dimmer System	C-1
Decorator Touch Dimmers	C-2
Decorator Slide Dimmers	C-3
Rotary Dimmers	C-4
Rotary Dimmers Replacement Knobs	C-5
Toggle Dimmers	C-6
Architectural Dimmers	C-7
Fan Speed Controls	C-8
Combination Fan Speed Dimming Controls	C-9
Standard Grade Motion Sensing Wall Switches	C-10
Commercial Specification Grade PIR Motion Sensing Wall Switches	C-11



Cooper Wiring Devices is poised to become the newest innovator in residential dimmers and fan controls. It begins with elegant design and the attention to detail evident in the 50-50 balance of our slide dimmers. It can be seen in such function enhancing features as full-on dimmer bypass, RFI protection, and the unequalled versatility of our new, microprocessor-controlled Smart Dimmers.

Beyond their form and function, these products abound with innovations that make installation simpler and easier to accomplish: longer mounting straps, lower profiles, the convenient backwire features of our slide dimmers, and wraparound heat sinks that eliminate the need to de-rate our devices for multi-gang installations. And, of course, our lighting and fan controls are all manufactured from the finest materials, and to the highest possible standards of quality.



## Lighting, fan and motion sensing controls.

Cooper Wiring Devices offers a complete line of lighting, fan and motion sensing controls. Dimmers and fan controls enhance the mood, appeal and functionality of any home or office. The Cooper Wiring Devices line of dimmers and fan controls features elegance, performance, convenience, and savings.

Dimmers can add lighting flexibility in any room. Entry foyers can be lit more dramatically; kitchens can be made bright for food preparation, softer for eating or meeting. Dimmed light can help to set a relaxed atmosphere in the bath or bedroom, and to comfort young children during the night.

### What do dimmers and fan controls do for you?

Cooper's full line of dimmers and fan controls creates an atmosphere for every occasion – bright lights for times when detail is required, softer lighting for casual or social occasions. They complement any room decor, and most are available in white, ivory, light almond, almond and black.

More than setting a mood or matching the decor, however, our dimmers save energy. When lights are lowered, less power is used and bulbs last longer – so over time, they provide payback for the cost of the dimmer.

Commercially, dimmers are flexible tools, and will provide the proper lighting for every situation. For example, in conference rooms, bright lighting is best for discussions, and dim light is appropriate for presentations. In restaurants, dimmed lighting is right for dining, while brighter lighting is good for cleaning.

### What makes Cooper Wiring Devices dimmers better?

1 First, aesthetics. All of our units are beautifully designed—streamlined to meet contemporary levels of taste and style. Lighted versions feature a very precise, defined area of light, giving our dimmers an elegant look.

2 Second, Cooper Wiring Devices dimmers offer enhanced functionality. In particular, the preset slide dimmer has been engineered to achieve a 50-50 balance between dimming and switching functions. This product is the first of its kind and sets a new standard for slide dimmer ergonomics.

3 Third, Cooper Wiring Devices dimmers are easy to install. The longer straps, lower profile and exclusive backwire features of our slide dimmers make installation remarkably simple.

4 A fourth benefit of Cooper Wiring Devices is "de-rating." De-rating means a decrease in the power rating of the dimmer when several dimmers are ganged together in a single wall box. Some manufacturers require their dimmers to be de-rated to 500 watts when two dimmers are installed together, and to 400 watts when three are ganged together. Cooper's 600-watt dimmers do not require de-rating when ganged. The full 600-watt rating applies in all multi-gang applications.

5 Fifth, Cooper Wiring Devices dimmer products offer Radio Frequency Interference (RFI) protection – special circuitry which eliminates interference with radio, TV and telephone systems.

In addition, Cooper Wiring Devices dimmers include the provision for ground connections required by the National Electrical Code Article 380-9b, effective January 1, 1999.



**Dimmers bring a little extra  
ambiance to a room.**

RESIDENTIAL  
COMMERCIAL

**C-Intro-1**  
LIGHTING AND  
FAN SPEED  
CONTROLS

### Cooper Wiring Devices Motion Sensing Wall Switches

Energy savings and convenience are among the benefits of replacing standard wall switches with Cooper Wiring Devices motion sensing wall switches. Because these devices are designed to turn on and maintain lighting only when a room is occupied, energy savings are achieved by automatically turning off lights in unoccupied rooms. Additional energy savings are possible through the adjustable ambient light control, which prevents lights from switching on in rooms already adequately illuminated with natural daylight.

Cooper Wiring Devices motion sensing wall switches also provide an added level of safety and convenience by automatically turning the light on when a person first enters the room. Motion sensing wall switches are ideal for children's rooms and bathrooms (where lights are most frequently left on) as well as utility rooms, basements, garages and other infrequently visited areas. They are easy to install and replace standard wall switches with no additional wiring necessary. All Cooper motion sensing wall switches are provided with matching wallplate and instructions.



RESIDENTIAL  
COMMERCIAL

**C-Intro-2**  
LIGHTING AND  
FAN SPEED  
CONTROLS



**Fan controls help cool and/or light a room.**



**Motion sensors save energy automatically.**




# Smart Dimmer System

600W Single Pole



RESIDENTIAL  
COMMERCIAL

**C-1**  
LIGHTING AND  
FAN SPEED  
CONTROLS

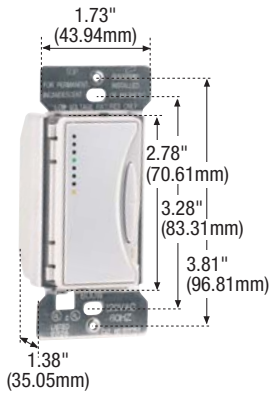

**SM600**

## Smart Dimmer System

### FEATURES

- Controls both incandescent and magnetic low voltage lighting.
- Amber LED to verify power; green LED bank indicates relative level of illumination – even in full daylight.
- Illumination level may be adjusted with switch in on or off position – ideal for nurseries, meeting rooms or anywhere presetting lighting levels are desired.
- Master controls as many as five remote units for multiple location installations.
- When lights are on, pressing switch for two-seconds initiates a delayed 10-second fade out.
- When lights are off, pressing switch for two-seconds overrides the preset for a quick fade up to full brightness.
- All dimmers are provided with extra large mounting straps, mounting screws, wire connectors and a matching wallplate.
- Color change kit installs easily and minimizes stocking expenses.


### Smart Master Dimmer

Rating	Color	Catalog No.
600W	Light Almond	SM600LA
	White	SM600W


### Smart Remote

Rating	Color	Catalog No.
For SM600	Light Almond	SMRLA
	White	SMRW

### For Single Dimmer Locations



### For Multiple Dimmer Locations

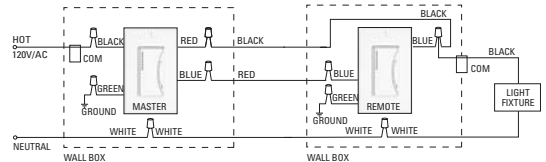

### De-rating

# of Gangs	600W Models
1	No De-rating
2	No De-rating
3 or more	500W

### Color Change Kits

Description	Color	Catalog No.
For Master Dimmer, includes Wallplate	Almond	SMMKITA
	Black	SMMKITBK
	Gray	SMMKITGY
	Ivory	SMMKITV
	Light Almond	SMMKITLA
For Smart Remote, includes Wallplate	Almond	SMRKITA
	Black	SMRKITBK
	Gray	SMRKITGY
	Ivory	SMRKITV
	Light Almond	SMRKITLA

### TESTING & CODE COMPLIANCE

- Meets all UL 1472 requirements.
- Meets all CSA requirements.
- UL and cUL approval (file no. E47967)
- NOM Certified

### MATERIAL CHARACTERISTICS

- Meets flammability requirements per UL94, V2 rated.
- Temperature Rating: 0°C to 35°C.



**SMMKIT**

# Decorator Touch Dimmers

600W Single Pole  
1000W Single Pole



RESIDENTIAL  
COMMERCIAL

**C-2**  
LIGHTING AND  
FAN SPEED  
CONTROLS


## Touch Dimmers

### FEATURES


- Ground terminals provided (meets 1999 NEC® requirement to ground dimmers).
- Back wire feature for easy installation.
- Wraparound strap eliminates need for de-rating.
- Air gap on/off switch for servicing fixture (UL required).
- Simple touch control of switching and dimming functions – provides ergonomically simple control that requires no manual dexterity.
- Touch dimmer remembers previous light setting during off period – allows user to return to previous light setting when turning lights on without readjustment.
- True multi-location dimming – allows complete control of lamps from several locations using standard 3-way wiring. Completely retrofittable.
- Radio Frequency Interference (RFI) filtering is standard on all models.

### Decorator Touch Dimmers

Rating	Description	Color	Catalog No.
600W	Gold touch plate Master	Ivory (Bezel) White (Bezel)	6460V 6460W
	Gold touch plate Remote	Ivory (Bezel) White (Bezel)	6461V 6461W
600W	Monochrome Master	Almond	6470A
		Black	6470BK
		Ivory	6470V
		Light Almond	6470LA
		White	6470W
1000W	Monochrome Master	Almond	6471A
		Black	6471BK
		Ivory	6471V
		Light Almond	6471LA
		White	6471W
	Monochrome Remote	Almond	6472A
		Black	6472BK
		Ivory	6472V
		Light Almond	6472LA
		White	6472W

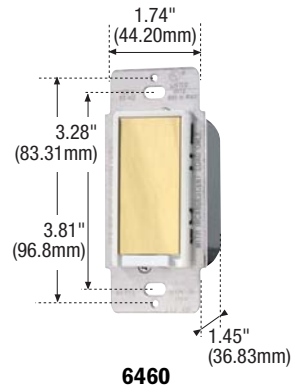


6460

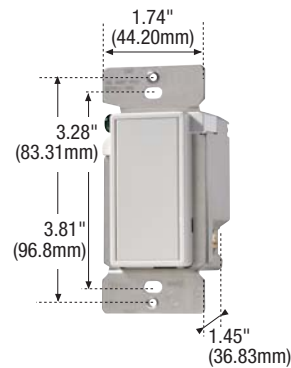


6470

### For Single Dimmer Locations



### For Multiple Dimmer Locations

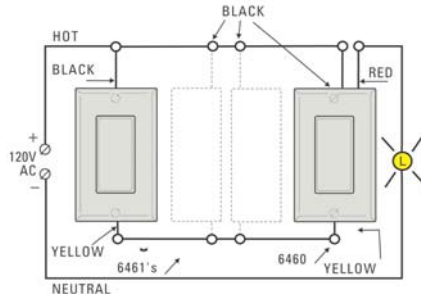

### De-rating

# of Gangs	600W Models	1000W Models
1	No De-rating	No De-rating
2	No De-rating	800W
3 or more	500W	650W

### TESTING & CODE COMPLIANCE

- Meets all UL 1472 requirements.
- Meets all CSA requirements.
- UL and cUL approval (file no. E47967)

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.





# Decorator Slide Dimmers

600W Single Pole, 3-Way  
1000W Single Pole, 3-Way



## Decorator Slide Dimmers

### FEATURES

- Longer mounting strap increases wall board contact area, virtually eliminating "floating" installations.
- Wraparound strap eliminates need for de-rating.
- Ground terminal meets 1999 NEC® requirement to ground dimmer.
- Exclusive 50/50 design provides the best ergonomic balance between switching and dimming.
- Back and side wire terminations - provides simple wiring installation that eliminates the need for wire connectors and allows easy power tap connection in multi-gang applications.
- Square law dimming-perceived dimming level is proportional to the slider position.
- Low-profile housing (shallowest of any slide dimmer on the market) provides for easy installation in wall box as minimal room is required.
- Preset feature available-allows user to return to previous light setting when turning lights on without readjustment.
- Lighted units available - allows easy location of the dimmer in the dark.
- Radio Frequency Interference (RFI) filtering is standard on all models.



RESIDENTIAL  
COMMERCIAL

**C-3**  
LIGHTING AND  
FAN SPEED  
CONTROLS

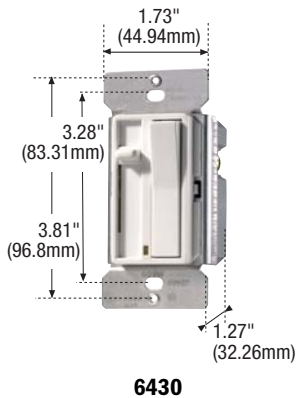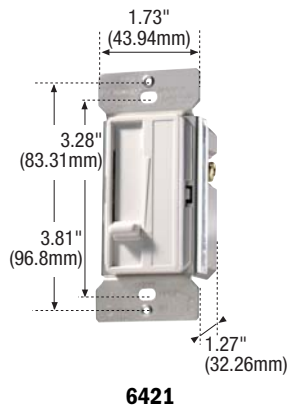

### Slide Dimmers

Rating	Description	Color	Catalog No.	
			Single Pole	3-Way
600W	Non-Preset	Almond	6421A	—
		Black	6421BK	—
		Ivory	6421V	—
		Light Almond	6421LA	—
		White	6421W	—
600W	Non-Preset, Lighted	Ivory	6431V	—
		White	6431W	—
600W	Preset	Almond	6420A	6423A
		Black	6420BK	6423BK
		Ivory	6420V	6423V
		Light Almond	6420LA	6423LA
		White	6420W	6423W
600W	Preset, Lighted	Almond	6430A	6433A
		Black	6430BK	6433BK
		Ivory	6430V	6433V
		Light Almond	6430LA	6433LA
		White	6430W	6433W
1000W	Preset, Lighted	Almond	6413A	6413A
		Black	6413BK	6413BK
		Ivory	6413V	6413V
		Light Almond	6413LA	6413LA
		White	6413W	6413W

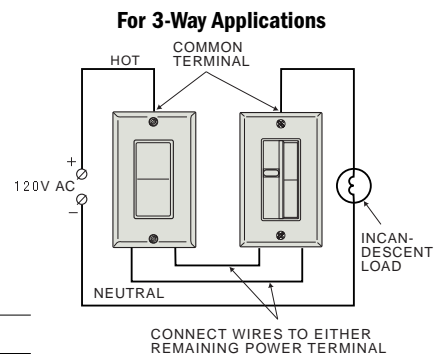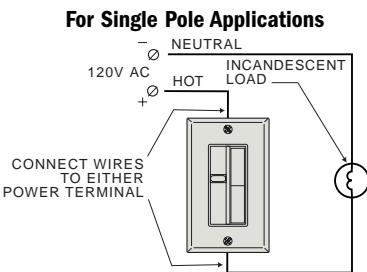

### De-rating

# of Gangs	600W Models	1000W Models
1	No De-rating	No De-rating
2	No De-rating	900W
3 or more	No De-rating	800W

### TESTING & CODE COMPLIANCE

- UL Listed, UL 1472 file E47967, CSA 10016 (6241-01)
- NOM Certified

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.

# Rotary Dimmers

600W Single Pole, 3-Way  
1000W Single Pole



RESIDENTIAL  
COMMERCIAL

**C-4**  
LIGHTING AND  
FAN SPEED  
CONTROLS


## Rotary Dimmers with Wire Leads

### FEATURES

- Ground lead provided (meets 1999 NEC® requirement to ground dimmers).
- 6" prestripped wire leads for fast, easy wiring.
- Wraparound strap eliminates need for de-rating.
- Longer mounting strap increases wall board contact area, virtually eliminating "floating" installations.
- Indicator light available helps locate dimmer in a dark room.
- Attractive stylized knob provides dimming, on/off control and indication of light level setting.
- Preset feature available - allows user to return to previous light setting when turning lights on without readjustment.
- Radio Frequency Interference (RFI) filtering is standard on all models.
- Light turns on within one quarter turn of knob from off position - guarantees wider range of adjustment.


### Rotary Dimmers with Wire Leads

Rating	Description	Color	Catalog No.	
			Single Pole	3-Way
600W	Non-Preset	Almond	6001A	—
		Ivory	6001V	—
		Light Almond	6001LA	—
		White	6001W	—
1000W	Non-Preset	Almond	6013A	—
		Ivory	6013V	—
		Light Almond	6013LA	—
		White	6013W	—
600W	Preset	Almond	6000A	6003A
		Ivory	6000V	6003V
		Light Almond	6000LA	6003LA
		White	6000W	6003W
600W	Preset, Lighted	Almond	6020A	6023A
		Ivory	6020V	6023V
		Light Almond	6020LA	6023LA
		White	6020W	6023W

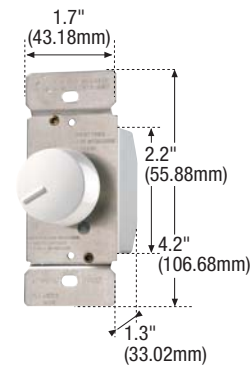


6001

### For Single Pole Applications

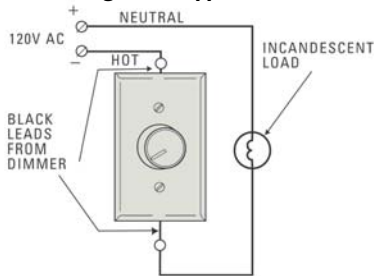

### For 3-Way Applications

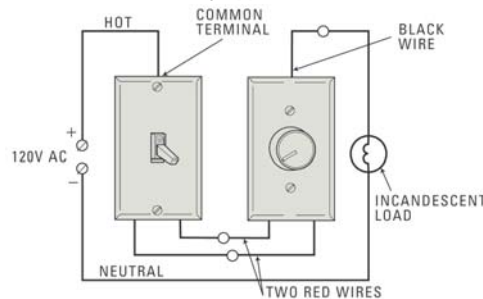

### De-rating

# of Gangs	600W Models	1000W Models
1	No De-rating	No De-rating
2	No De-rating	900W
3 or more	No De-rating	800W

### TESTING & CODE COMPLIANCE

- UL Listed, UL 1472 file E47967, CSA 10016 (6241-01)
- NOM Certified

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.



# Rotary Dimmers Replacement Knobs

## Rotary Replacement Knobs

### FEATURES

- Attractive stylized knob provides dimming, on/off control and indication of light level setting.

### Rotary Replacement Knobs

Color	Replacement for	Catalog No.
Almond	6020, 6023	6007A
Black	(Lighted Models)	6007BK
Brown		6007B
Gray		6007GY
Ivory		6007V
Light Almond		6007LA
White		6007W
Almond	6000, 6001 & 6003	6009A
Black	(Non-Lighted Models)	6009BK
Brown		6009B
Gray		6009GY
Ivory		6009V
Light Almond		6009LA
White		6009W



6007 And 6009

RESIDENTIAL  
COMMERCIAL

**C-5**  
LIGHTING AND  
FAN SPEED  
CONTROLS

### TESTING & CODE COMPLIANCE

- UL Listed, UL 1472 file E47967, CSA 10016 (6241-01)
- NOM Certified

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.



# Toggle Dimmers

600W Single Pole, 3-Way  
1000W Single Pole, 3-Way



RESIDENTIAL  
COMMERCIAL

**C-6**  
LIGHTING AND  
FAN SPEED  
CONTROLS

### TESTING & CODE COMPLIANCE

- Meets all UL 1472 requirements.
- Meets all CSA requirements.
- UL and cUL approval (file no. E47967)
- NOM Certified

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.


## Toggle Dimmers

### FEATURES


- Ground lead provided (meets 1999 NEC® requirement to ground dimmers).
- 6" (152.4mm) prestripped wire leads for fast, easy wiring.
- Wraparound strap eliminates need for de-rating.
- Toggle element provides smooth, positive motion for dimming and on/off control.
- Toggle is aesthetically designed to match the most common residential toggle switches on the market.
- Toggle position allows user to visually read the light setting.
- 3-way units available – allows user to use a dimmer in a three-way application.
- Lighted units available – allows easy location of the dimmer in the dark.

### Toggle Dimmers


Rating	Description	Color	Catalog No.	
			Single Pole	3-Way
600W	Framed Toggle	Almond	6441A	6443A
		Ivory	6441V	6443V
		Light Almond	6441LA	6443LA
		White	6441W	6443W
1000W	Framed Toggle	Almond	6453A	6453A
		Ivory	6453V	6453V
		Light Almond	6453LA	6453LA
		White	6453W	6453W
600W	Framed Toggle, Lighted	Clear	6441LTC	6443LTC
1000W	Framed Toggle, Lighted	Clear	6453LTC	6453LTC



### For Single Pole Applications



### For 3-Way Applications

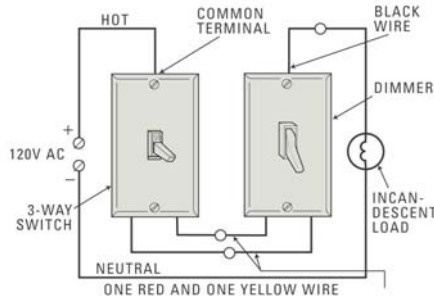

### De-rating

# of Gangs	600W Models	1000W Models
1	No De-rating	No De-rating
2	No De-rating	900W
3 or more	No De-rating	800W




# Architectural Dimmers

1000W 1500W 2000W

## Architectural Dimmers

### FEATURES


- 6" (152.4mm) prestripped wire leads for fast, easy wiring.
- Heat sink can be de-rated for ganging purpose.
- Back body fits standard wall box.
- Attractive stylized dial provides on/off and dimming control.



### Architectural Dimmers

Rating	Description	Color	Catalog No. Single Pole
1000W	Rotary On/Off	Black	1000
1500W	Rotary On/Off	Black	1500
2000W	Rotary On/Off	Black	2000

### For Single Pole Applications

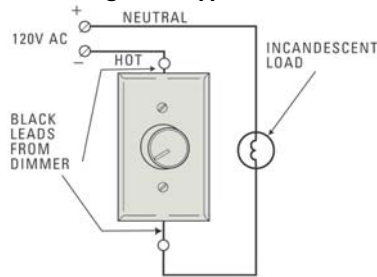

### De-rating

# of Gangs	1000W	1500W	2000W
1	No De-rating	No De-rating	No De-rating
2	800W	1400W	1800W
3 or more	700W	1300W	1600W

RESIDENTIAL  
COMMERCIAL

**C-7**  
LIGHTING AND  
FAN SPEED  
CONTROLS

TESTING & CODE  
COMPLIANCE

· UL Listed

# Fan Speed Controls



## Fan Speed Controls

### FEATURES

- Ground lead provided (meets 1999 NEC® requirements to ground dimmers).
- Wraparound strap eliminates need for de-rating.
- Longer strap increases wallboard contact area, virtually eliminating “floating” installations.
- Fully variable and multi-speed “quiet versions” available.
- Fully variable controls all rated 5 amps to allow several fans to operate simultaneously.
- Models with adjustable trim have minimum speed adjustment accessible after installation.

### Rotary Fan Speed Controls




Rating	Operation	Style	Color	Catalog No.
1.5A	3 Speed	Rotary Quiet Control	Almond	6008A
			Ivory	6008V
			Light Almond	6008LA
			White	6008W
5A	Fully Variable	Rotary	Almond	6006A
			Ivory	6006V
			Light Almond	6006LA
			White	6006W
5A	Fully Variable	Rotary with Adjustable Trim	Almond	6005A
			Ivory	6005V
			Light Almond	6005LA
			White	6005W

### Toggle Fan Speed Controls

Rating	Operation	Style	Color	Catalog No.
5A	Fully Variable	Toggle	Almond	6446A
			Ivory	6446V
			Light Almond	6446LA
			White	6446W

### Slide Fan Speed Controls

Rating	Operation	Style	Color	Catalog No.
1.5A	3 Speed	Decorator, Slide	Almond	6428A
			Ivory	6428V
			Light Almond	6428LA
			White	6428W
5A	Fully Variable	Decorator, Slide with Adjustable Trim	Almond	6426A
			Ivory	6426V
			Light Almond	6426LA
			White	6426W
5A	Fully Variable	Decorator, Slide with Adjustable Trim and Preset Switch	Almond	6425A
			Ivory	6425V
			Light Almond	6425LA
			White	6425W

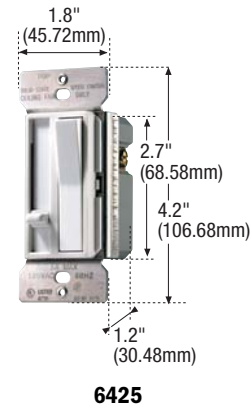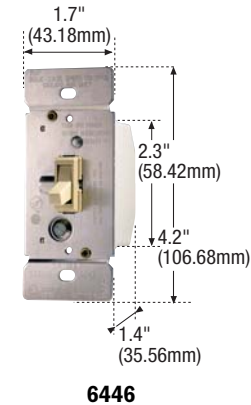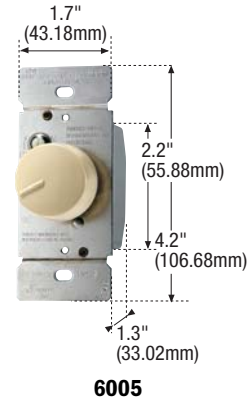

RESIDENTIAL  
COMMERCIAL

## C-8 LIGHTING AND FAN SPEED CONTROLS

### TESTING & CODE COMPLIANCE

- Meets all UL 1917 requirements.
- Meets all CSA requirements
- UL and cUL approved, file no. E202842
- NOM Certified except 6446A/V/W

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.




# Combination Fan Speed Dimming Controls


## Fan Speed Controls

### FEATURES

- Ground lead provided (meets 1999 NEC® requirements to ground dimmers).
- Wraparound strap eliminates need for de-rating.
- Longer strap increases wallboard contact area, virtually eliminating “floating” installations.
- Fully variable and multi-speed “quiet versions” available.
- Fits standard Decorator opening.
- Models with adjustable trim have minimum speed adjustment accessible after installation.

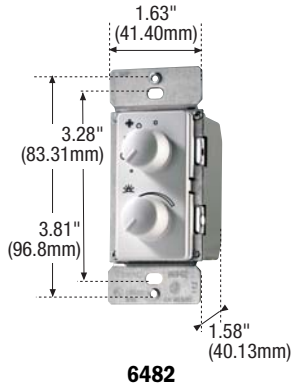

6482

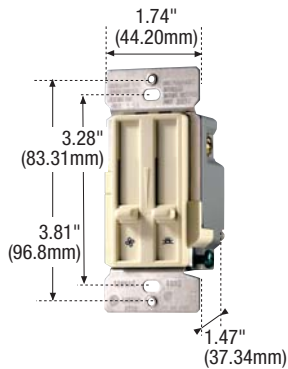

6492

RESIDENTIAL  
COMMERCIAL

## C-9 LIGHTING AND FAN SPEED CONTROLS

### Rotary Combination Controls

Rating	Operation	Style	Color	Catalog No.
1.5A/300W	4 Speed Fan Full Range Dimmer	Decorator, Rotary	Almond	6482A
			Ivory	6482V
			Light Almond	6482LA
			White	6482W
2.5A/300W	Fully Variable Fan Full Range Dimmer	Decorator, Rotary with Adjustable Trim	Almond	6480A
			Ivory	6480V
			Light Almond	6480LA
			White	6480W

### Decorator Slide Combination Controls

Rating	Operation	Style	Color	Catalog No.
1.5A/300W	3 Speed Fan Full Range Dimmer	Slide	Almond	6492A
			Ivory	6492V
			Light Almond	6492LA
			White	6492W
2.5A/300W	Fully Variable Fan Full Range Dimmer	Slide with Adjustable Trim	Almond	6490A
			Ivory	6490V
			Light Almond	6490LA
			White	6490W

### Rotary Combination Controls Replacement Knobs for 6482 & 6480

Rating	Operation	Style	Color	Catalog No.
			Almond	6084A
			Ivory	6084V
			Light Almond	6084LA
			White	6084W



6084

### TESTING & CODE COMPLIANCE

- Meets all UL 1917 requirements.
- Meets all CSA requirements
- UL and cUL approved, file no. E202842
- NOM Certified except 6446A/V/W

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.

# Commercial Specification Grade PIR Motion Sensing Wall Switches



RESIDENTIAL  
COMMERCIAL

## Commercial Specification Grade PIR Motion Sensing Wall Switches

### FEATURES

- Passive Infrared (PIR) sensors with fresnel lens detects large and small movement for reliable occupancy sensing.
- 180° wide angle detection up to 900 sq. ft. (274.32 sq. m) allows coverage of entire room.
- Selectable manual on/auto off allows users to maximize energy savings.
- Adjustable off time delay allows user to customize sensor operation to individuals movement pattern (30 sec. - 30 min.).
- Compatible with all magnetic and electronic fluorescent ballasts (both 120V & 277V).
- No minimum load requirement.
- LED walk test indicator for ease of setup.
- Meets California Title 24 requirements.



### 180° Wallbox Motion Sensor

Ratings	Description	Area of Coverage	Shut Off Delay	Color	Catalog No.
Fluorescent: 1000W @ 120V	Single Pole	900 sq. ft. (274.32 sq. m)	Adjustable	Ivory	6111V
Incandescent: 800W @ 120V			30 sec. - 30 min.	White	6111W
Motor: 1/6 HP @ 120V					
Fluorescent: 1800W @ 277V	Single Pole	900 sq. ft. (274.32 sq. m)	Adjustable	Ivory	6117V
Motor: 1/6 HP @ 277V			30 sec. - 30 min.	White	6117W



6111

## C-10 LIGHTING AND FAN SPEED CONTROLS

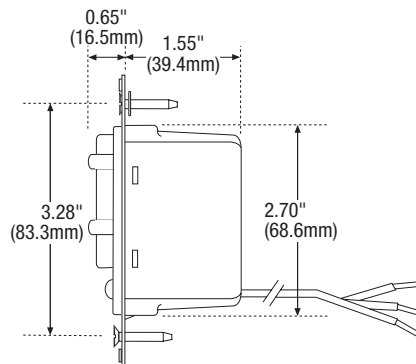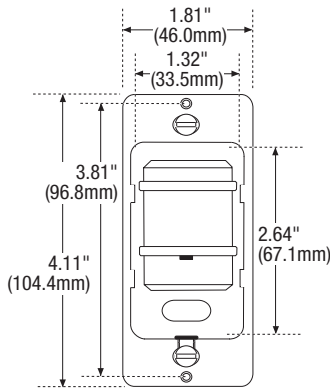


### TESTING & CODE COMPLIANCE

- UL Listed to file E106925
- cUL Listed

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL 92, V2 rated.  
Temperature Rating: -20°C to 70°C.



# Standard Grade Motion Sensing Wall Switches




RESIDENTIAL  
COMMERCIAL

**C-11**  
LIGHTING AND  
FAN SPEED  
CONTROLS

## Motion Sensing Wall Switches

### FEATURES


- Passive Infrared (PIR) Sensors with fresnel lens detects large and small movement for reliable occupancy sensing.
- Wide angle detection up to 180° allows coverage of most or all of a room.
- Selectable manual or automatic operation allows user to easily switch between operation modes.
- Large area coverage 400-1,600 sq. ft. (121.92-487.68 sq. m) usage in wide range of rooms.
- Adjustable off time delay allows user to customize sensor operation to individuals movement pattern (except 6103).
- Adjustable ambient light control keeps lights from switching on when sufficient natural light already exists (except 6103).
- Operates with fluorescent magnetic ballasts only.

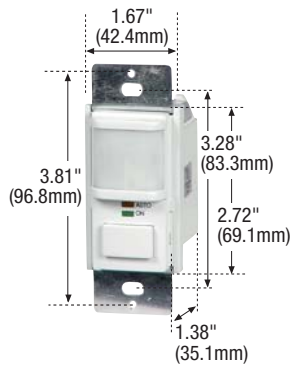

**6109**

### 180° Wallbox Motion Sensor


Ratings	Description	Area of Coverage	Shut Off Delay	Color	Catalog No.
Fluorescent: (2) 30W min. 400W max. @120V Rapid Start Incandescent: 500W @120V Motor: 1/6 HP @120V	Single Pole	1,600 sq. ft. (487.68 sq. m)	Adjustable 12 seconds to 30 minutes	Ivory White	6109V 6109W

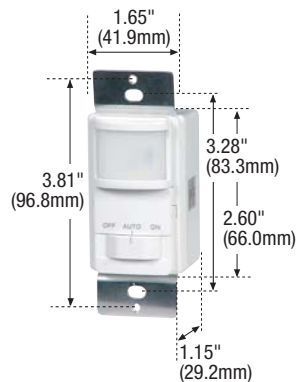

**6105**

### 150° Wallbox Motion Sensor

Ratings	Description	Area of Coverage	Shut Off Delay	Color	Catalog No.
Fluorescent: (2) 30W min. 400W max. @120V Rapid Start Incandescent: 500W @120V Motor: 1/8 HP @120V	Single Pole	900 sq. ft. (274.32 sq. m)	Adjustable 5 seconds to 20 minutes	Ivory White	6105V 6105W
Fluorescent: 400W max. @120V Rapid Start Incandescent: 500W @120V Motor: 1/8 HP @120V	3-Way	900 sq. ft. (274.32 sq. m)	Adjustable 5 seconds to 20 minutes	Ivory White	6107V 6107W

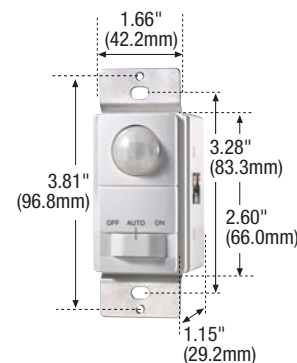

**6103**

### 110° Wallbox Motion Sensor

Ratings	Description	Area of Coverage	Shut Off Delay	Color	Catalog No.
Fluorescent: (2) 30W min. 400W max. @120V Rapid Start Incandescent: 500W @120V Motor: 1/8 HP @120V	Single Pole	400 sq. ft. (121.92 sq. m)	Fixed: 5 minutes	Ivory White	6103V 6103W

### TESTING & CODE COMPLIANCE

- UL Listed, UL 773A file E88585
- cUL Listed

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL 94, V2 rated.  
Temperature Rating: 0°C to 50°C.